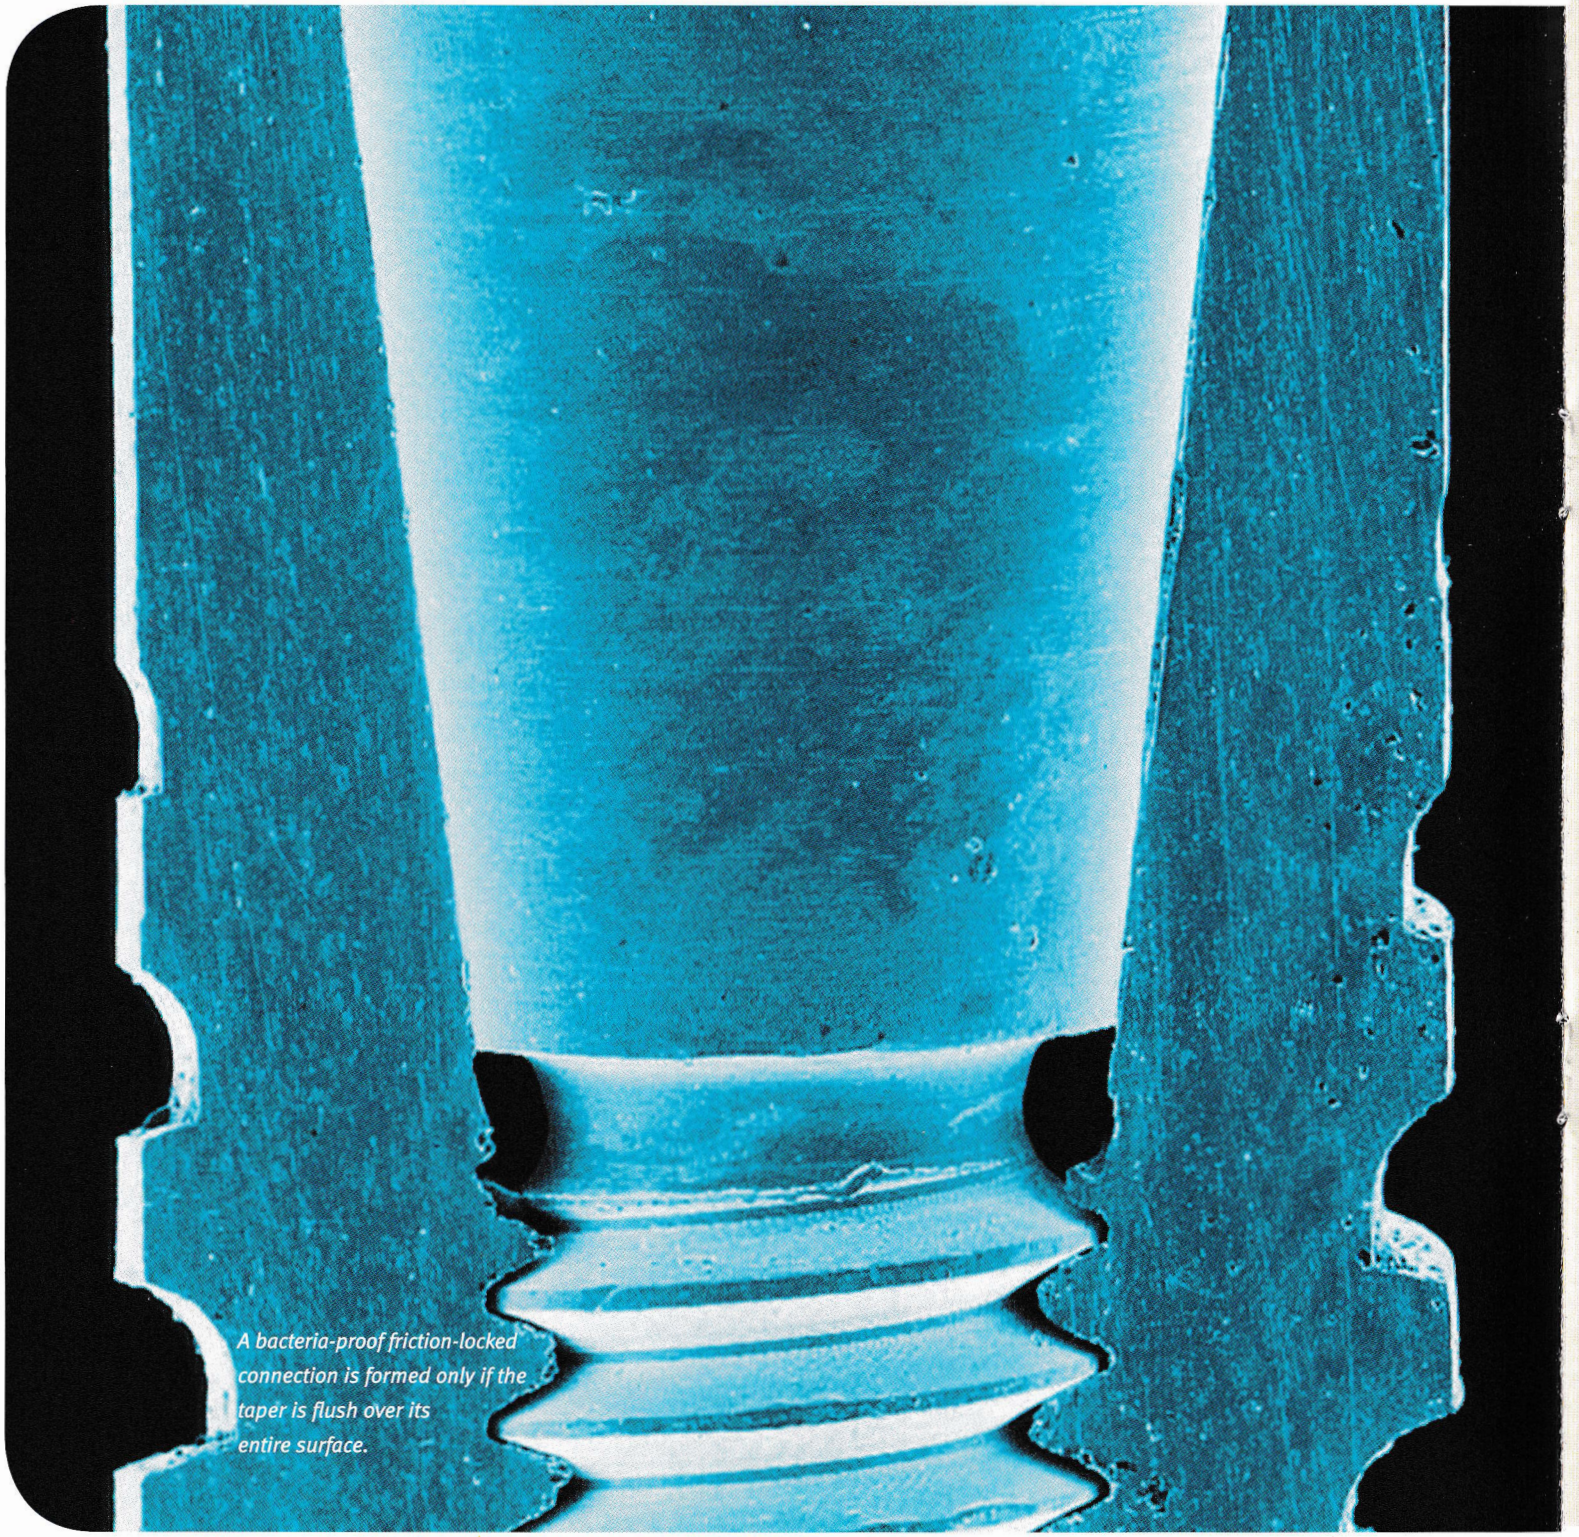

A bacteria-proof friction-locked connection is formed only if the taper is flush over its entire surface.